

A3 Outdoor Vertical Advertising Display

Model Number	LSHW-32	LSHW-43	LSHW-49	LSHW-55	LSHW-65	LSHW-75	LSHW-86
Main Image							
Size	32"	43"	49"	55"	65"	75"	86"
Display Parameters							
Screen Type	TFT-LED						
Screen Ratio	16:09						
Display Area	708.42*398.48(mm)	951.93*535.46(mm)	1084.76*610.18(mm)	1217.59*684.89(mm)	1438.97*809.42(mm)	1660*934(mm)	1903.87*1070.93(mm)
Resolution	1920*1080	1920*1080/3840*2160					
Frequency	60HZ						
Brightness	2000cd/m²					2500cd/m²	
Contrast	1500: 1						
Response Time	6ms						
Viewing Angle	178/178/178/178						
Screen Protection	6mm High-Transparency Ultra-Clear Tempered Glass						
Service Life	>50000H						
Ambient Light Sensing	Supports Manual/Automatic Ambient Light Sensing (Energy Saving)						
System							
Chip	V100						
CPU	Octa-core A55						
GPU	G52						
RAM+ROM	2+32G						
System Version	Android12.0						
Interface							
DC-12V Input (POWER IN)	*1						
USB2.0-A	*1						
USB3.0-A	*1						
RJ45 Network Port (100M)	*1						




HDMI IN	*1						
TF Card	*1						
Line-Out	*1						
WIFI	2.4G						
BT	BT4.0						
Heat Dissipation Method							
Heat Dissipation Method	Intelligent Temperature-Controlled Air-Cooling System						
Temperature Protection	Supports High Temperature Protection						
Fan	Industrial-grade High-volume, Quiet Fan With Adjustable Speed for Noise Reduction (Energy Saving)						
Touchscreen (Optional)							
Touch Types	G+G Capacitive Waterproof Touch / G+F Nano Waterproof Touch						
Number of Touch Points	10 Points						
Touch Accuracy	99%						
Electrical Parameters							
Power Supply	AC110-220V						
Max Power Consumption	≤240W	≤325W	≤345W	≤395W	≤490W	≤762W	≤1380W
Standby Power Consumption	≤3W						
Overall Parameters							
Net Weight/kg	76	110	110	120	145	170	235
Gross Weight/kg	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications
Product Dimensions (L*W*T)	/	/	/	/	/	/	/
Packaging Size (L*W*T)	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications
Waterproof Rating	IP65						
Shell Material (Front Frame/Back Shell)	Sheet Metal						
Shell Color (Front Frame/Back Shell)	Black						
Speaker	8Ω10W*A Pair						
Accessories							
Product Manual	*1						
Power Cord	*1						
Warranty Card & Certificate Of Conformity	*1						
Remote Control	*1						
WiFi Adapter	*1						
Wall Mount + Wall Mount Screws	*1						

Environmental Factors

Operating Temperature	-10°C to 50°C (If the ambient temperature is below -10°C, it is recommended to select a heater)
Operating Humidity	5% -90%
Storage Temperature	-20°C ~60°C
Storage Humidity	10%~85%RH
Operating Altitude	Below 5000m

Dimension Drawing

32°	
43°	

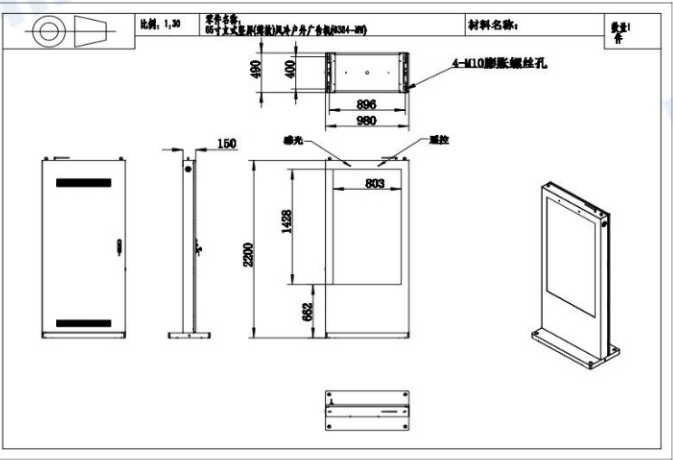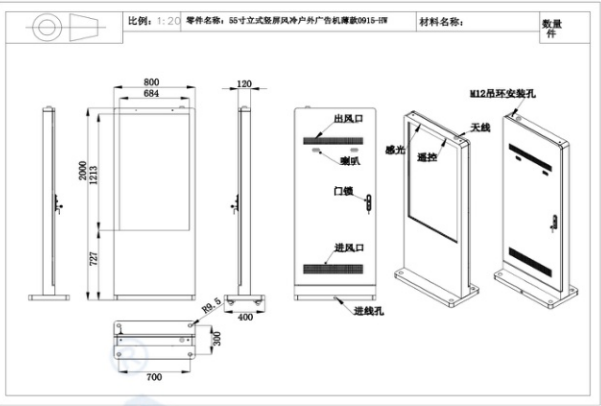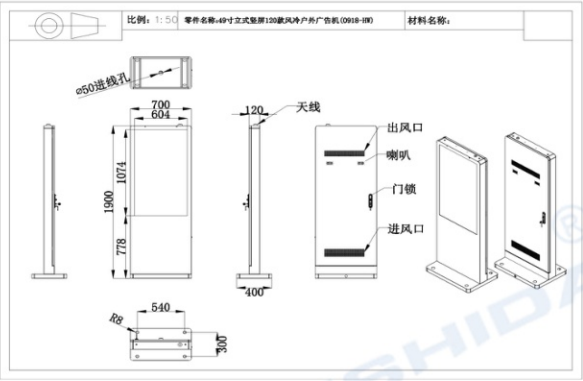

75°

