

A3 Outdoor Wall Bracket Advertising Display


Model Number	BGHW-32	BGHW-43	BGHW-49	BGHW-55	BGHW-65	BGHW-75	BGHW-86
Main Image							
Size	32"	43"	49"	55"	65"	75"	86"
Display Parameters							
Screen Type	TFT-LED						
Screen Ratio	16:09						
Display Area	708.42*398.48(mm)	951.93*535.46(mm)	1084.76*610.18(mm)	1217.59*684.89(mm)	1438.97*809.42(mm)	1660*934(mm)	1903.87*1070.93(mm)
Resolution	1920*1080	1920*1080/3840*2160					
Frequency	60HZ						
Brightness	2000cd/m²					2500cd/m²	
Contrast	1500: 1						
Response Time	6ms						
Viewing Angle	178/178/178/178						
Screen Protection	6mm High-Transparency Ultra-Clear Tempered Glass						
Service Life	>50000H						
Ambient Light Sensing	Supports Manual/Automatic Ambient Light Sensing (Energy Saving)						
System							
Chip	V100						
CPU	Octa-core A55						
GPU	G52						
RAM+ROM	2+32G						
System Version	Android12.0						
Interface							
DC-12V Input (POWER IN)	*1						
USB2.0-A	*1						
USB3.0-A	*1						
RJ45 Network Port (100M)	*1						

HDMI IN	*1						
TF Card	*1						
Line-Out	*1						
WIFI	2.4G						
BT	BT4.0						
Heat Dissipation Method							
Heat Dissipation Method	Intelligent Temperature-Controlled Air-Cooling System						
Temperature Protection	Supports High Temperature Protection						
Fan	Industrial-grade High-volume, Quiet Fan With Adjustable Speed for Noise Reduction (Energy Saving)						
Touchscreen (Optional)							
Touch Types	G+G Capacitive Waterproof Touch / G+F Nano Waterproof Touch						
Number of Touch Points	10 Points						
Touch Accuracy	99%						
Electrical Parameters							
Power Supply	AC110-220V						
Max Power Consumption	≤210W	≤239W	≤310W	≤375W	≤490W	≤690W	≤1400W
Standby Power Consumption	≤3W						
Overall Parameters							
Net Weight/kg	30	55	64	77	98	140	224
Gross Weight/kg	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications
Product Dimensions (L*W*T)	/	/	/	/	/	/	/
Packaging Size (L*W*T)	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications	Based primarily on the actual product packaging specifications
Waterproof Rating	IP65						
Shell Material (Front Frame/Back Shell)	Sheet Metal						
Shell Color (Front Frame/Back Shell)	Black						
Speaker	8Ω10W*A Pair						
Accessories							
Product Manual	*1						
Power Cord	*1						
Warranty Card & Certificate Of Conformity	*1						
Remote Control	*1						
WiFi Adapter	*1						
Wall Mount + Wall Mount Screws	*1						


[illegible]

--	--

32"

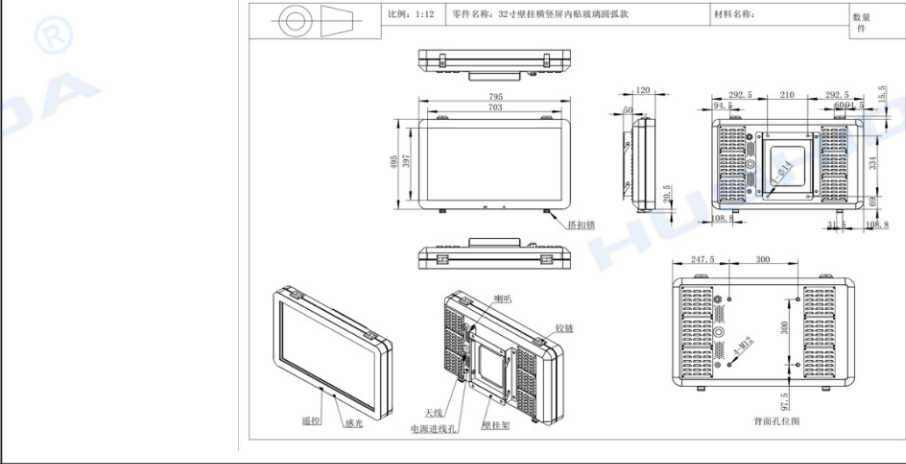

43"

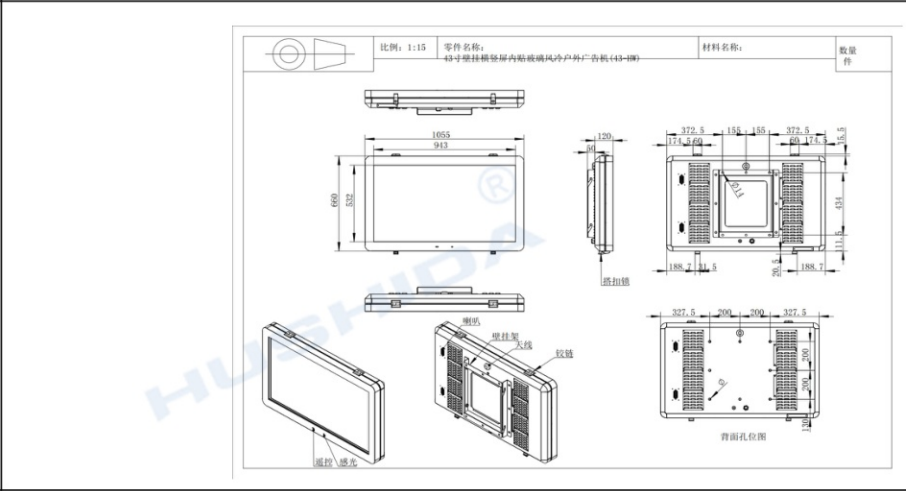

[illegible]

比例: 1:10 零件名称: 55寸壁挂横置风冷户外广告机 (55-100) 材料名称:

数量
件

Technical drawing of the 55-inch outdoor advertising machine, showing front, side, top, and detail views with dimensions.

Dimensions (mm):


- Front View: 1365 (width), 850 (height), 1213 (inner width), 683 (inner height), 58 (bottom left offset), 21 (bottom center offset), 148.8 (bottom right offset).
- Side View: 120 (depth), 20.5 (bottom offset).
- Top View: 502.5 (left), 110 (center), 120 (center), 502.5 (right), 684 (height), 37 (bottom offset).
- Detail View: 120 (width), 20.5 (height), 148.8 (offset).
- Bottom View: 437.5 (left), 213 (center), 213 (center), 437.5 (right), 213 (height), 213 (height), 213 (height), 213 (height).

Labels:

- USB接口 (USB port)
- 摄像头 (Camera)
- 天线 (Antenna)
- 散热架 (Cooling rack)
- 感光 (Light sensing)
- 遥控 (Remote control)

机背部孔位尺寸图

	比例：1:25	零件名称：65寸壁挂横屏风冷户外广告机(65-DR)	材料名称：	数量 件
---	---------	----------------------------	-------	---------

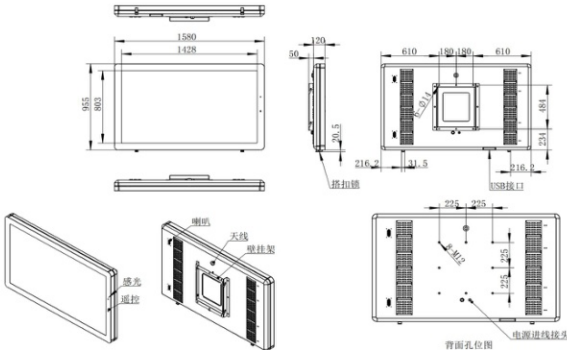

Technical drawing showing the front view and side view of the outdoor advertising machine frame.


Dimensions:

- Front View: Overall width 1580, overall height 863. Internal cutout width 1528, internal cutout height 803.
- Side View: Depth dimensions include 320 (total depth), 50 (bezel depth), 216.2 (mounting bracket depth), 216 (rear panel depth), and 20.5 (gap).
- Top View: Width dimensions include 610 (left segment), 1800 (total width), and 610 (right segment). Height dimensions include 48 (top/bottom bezels), 23 (central gap), 216 (rear panel height), and 858 (total height).
- Bottom View: Shows internal components like the power cord connection point (电源线接头), antenna (天线), and sensor (感光).

Labels:

- 挂扣锁 (Hanging Lock)
- B50接口 (B50 Interface)
- 感光 (Light Sensing)
- 温控 (Temperature Control)
- 喇叭 (Speaker)
- 天线 (Antenna)
- 壁挂架 (Wall Mount Bracket)
- 电源孔位图 (Power Port Location Diagram)
- 电源线接头 (Power Cord Connector)

75"

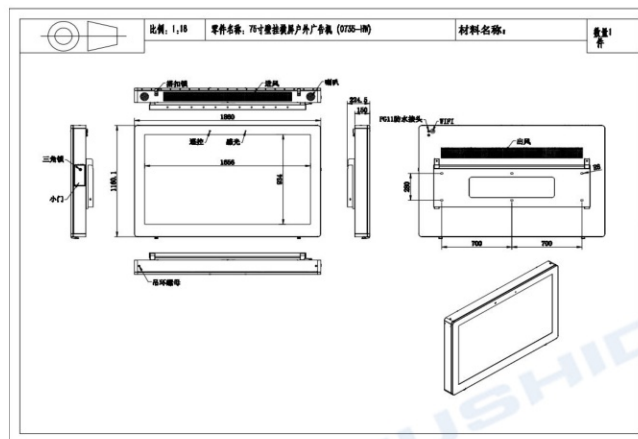

86"

