HUSHIDA
Smart display, One-step Service

H1 Infrared Live Streaming Display with V1 Mobile Stand

Model Number	BGCM-32	BGCM-43	BGCM-50	BGCM-55
Main Image				
Size	32″	43″	50″	55″
Style	24B	24B	24B	24B
Display Parameters				
Screen Type	LCD A-Grade			
Backlight Type	E-LED			
Display Area	698.4(H)×392.9(V)mm	941.2(H)×529.4(V)mm	1095.8(H)×616.4(V)mm	1210.6(H)×685(V)mm
Resolution	1920×1080			
Brightness	350cd/m²			
Response Time	7ms			
Contrast	1200:1			
Color Gamut	76% NTSC (CIE1931)	71% NTSC (CIE1931)	72% NTSC (CIE1931)	72% NTSC (CIE1931)
Tempered Glass	AG Anti-Glare			
Viewing Angle	89/89/89/89 (Min.)(CR≥10)			
Service Life	>50000H			
System				
CPU	QCM6125-8 Core(4*A73+4*A53)-64bit			
GPU	Adreno 610			
RAM+ROM	4+64G（Optional 8+128）			
Version System	Android 13.0			
Interface				
DC12V	*1			
TOP-Micro SD	*1			
USB-A2.0	*2			
HDMI IN	*1			
Debug	*1			
MIC IN	*1			
Headphones	*1			
Network port	*1			
WIFI	802.11 a/b/g/n/ac			
Bluetooth	Bluetooth5.0			
Touch Parameters				
Touch Specifications	Infrared Touch Frame			
Number of Touch Points	20 Points			
Response Time	≤15ms			
Point Accuracy	Over 90% of the touch area is ±2mm			
Electrical Parameters				
Power Supply	AC100-240V~(+/-10%),50/60Hz			
Power Cord Plug Standard	CN Standard220V			
Max Power Consumption	54W	68W	85W	103W
Overall Parameters				
Net Weight/kg	Unit：9.05kg；Base：12.5kg	Unit：15.8kg ；Base：12.5kg	Unit：20.3kg ；Base：12.5kg	Unit：23.6kg；Base：12.5kg

Gross Weight/kg	Unit：12kg；Base：14.5kg	Unit：20kg；Base：14.5kg	Unit：25kg；Base：14.5kg	Unit：29.2kg；Base：14.5kg
Product Dimensions (L*W*T)	Unit: 740 (H) × 434.7 (W) × 65.3 (D) mm, excluding wall mount Base: 1446.8 (H) mm	Unit: 983 (H) × 571.5 (W) × 65.3 (D) mm, excluding wall mount Base: 1446.8 (H) mm	Unit: 1137.4 (H) × 658.5 (W) × 65.3 (D) mm, excluding wall mount Base: 1446.8 (H) mm	Unit: 1252.1 (H) × 723.5 (W) × 65.3 (D) mm, excluding wall mount Base: 1446.8 (H) mm
Packaging Size（L*W*T）	Unit:800 (H) × 540 (W) × 150 (D) mm Base: 1365 (H) × 520 (W) × 125 (T) mm	Unit: 1040(L)×670(W)×150(T)mm Base: 1365(H)×520(W)×125(T)mm	Unit: 1200(L)×760(W)×150(T)mm Base: 1365(H)×520(W)×125(T)mm	Unit: 1320(L)×830(W)×150(T)mm Base: 1365(H)×520(W)×125(T)mm
Shell Material (Front Frame/Back Shell)	Aluminum Alloy/Sheet Metal			
Shell Color (Front Frame/Back Shell)	Black			
Wall-mount hole spacing	200*200 mm	400*300 mm		
Speaker	8Ω10W*A Pair			
Accessories				
Product Manual	*1			
Power Cord	*1			
Warranty Card & Certificate Of Conformity	*1			
Mobile Stand with Wheels	*1			
Environmental Factors				
Operating Temperature	0℃~40℃			
Operating Humidity	10%~90%RH			
Storage Temperature	-20℃~60℃			
Storage Humidity	10%~90%RH			
Operating Altitude	Below 5000m			
Dimension Drawing				
32"	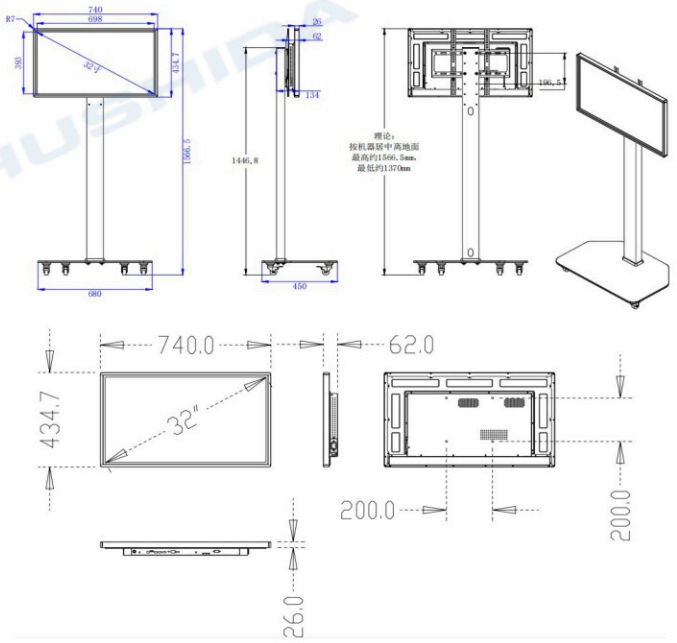			

43"	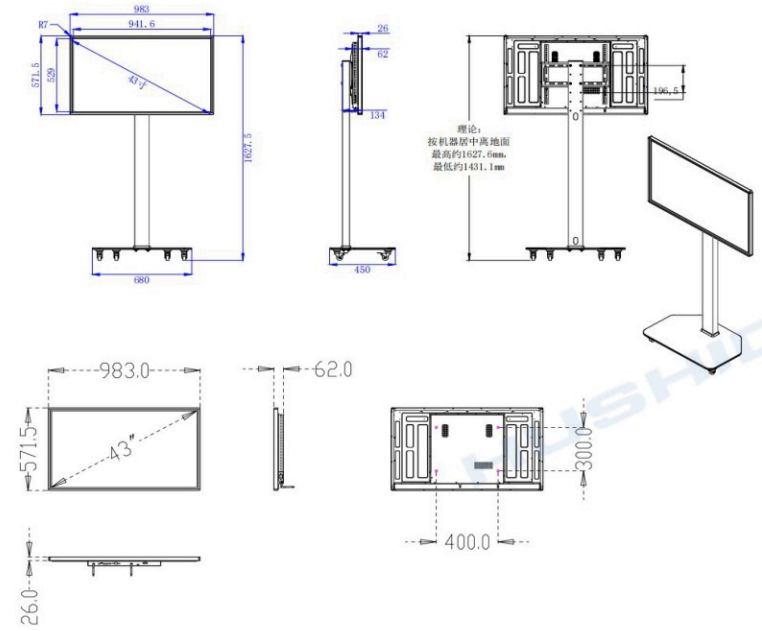
50"	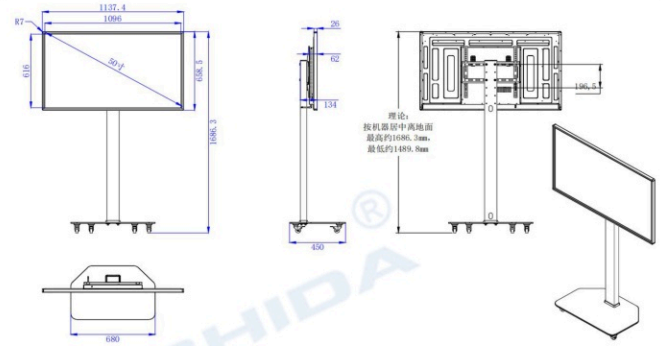 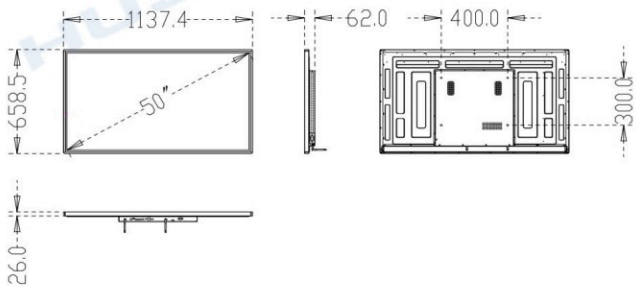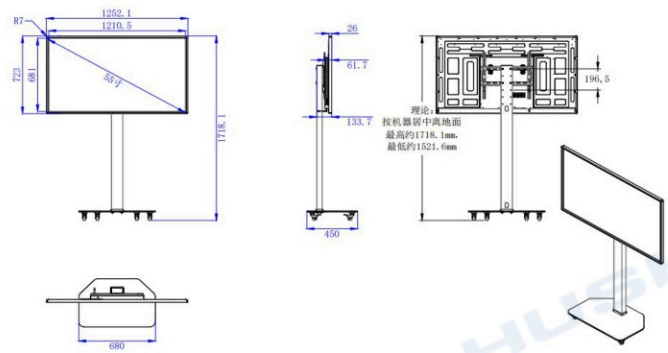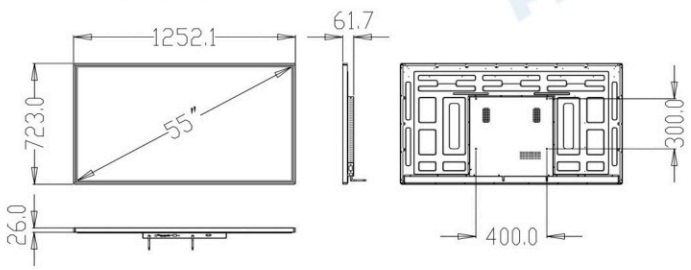
55"